

F130-500




Technische Infos

Höhe (Dicke)	130mm
Breite	500mm
Länge	Wap. S350: 0,70m => 5,30m uit voorraad (per 10cm oplopend) Wap. S700: 1,90m => 5,40m uit voorraad (per 10cm oplopend)
Feuerwiderstand	1 uur (2u op bestelling)
Expositionsklasse	XC1
Transportgewicht	1,77 kN/m ²
Gewicht /m	0,89 kN/m
Bemessungsgewicht	2,10 kN/m ² (incl. voegvulling)
Hohlraumfüllung	5,41 l/m
Füllbeton	9 l/m ²
Betongüte	C 40/50
Stahlqualität	f(yk) 500; f(tk) 550 vanaf 3,80 m

Keurmerken



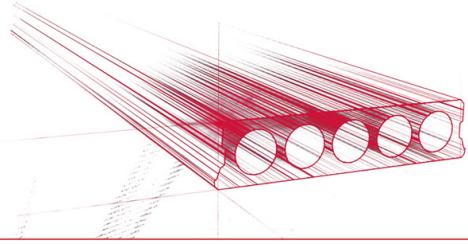



Spannweiten

Zie hiervoor onze online rekenmodule




Bohrvorschriften

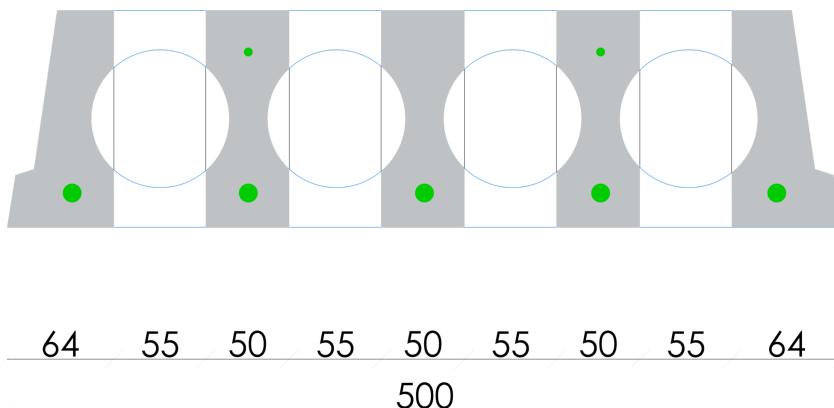

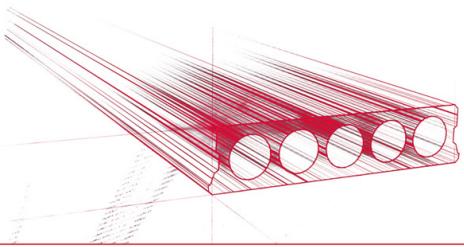

Bewehrungspositionen

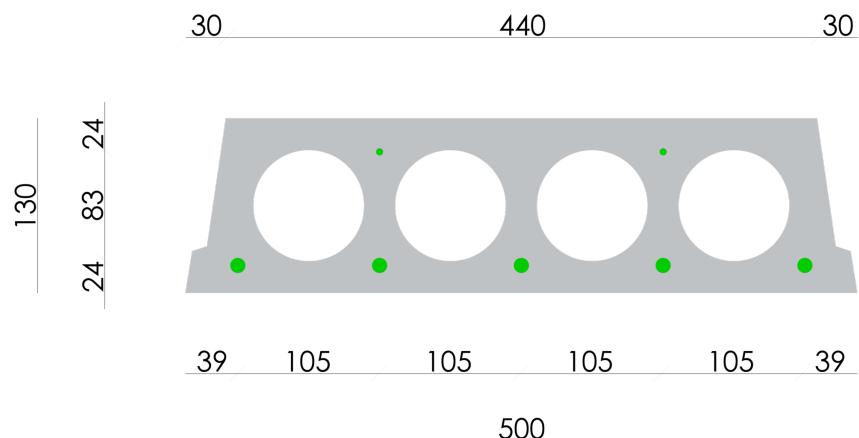




Zubehör



Passplatten - Stahlbeton-Hohlplatte



Schrägschnitte




Ausstehende Bewehrung



Verjüngte Unterseite



Verjüngte Oberseite




Eckaussparungen



Kopfaussparung



Rundaussparung



Rundaussparung




Ausnehmungen zur Plattenkopplung



Geöffnete Hohlkammern




Open kanalen met inhawapening



Wechselreisen
Stahlbeton-Hohlplatten



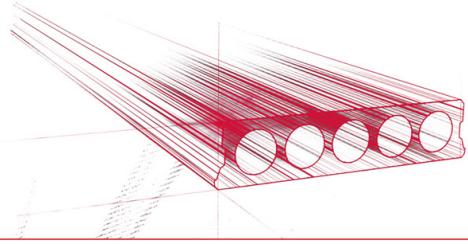

Vorrat

	Produktion	Abnehmbar	Vorrätig
Malle 1	X	X	X
Malle 2			
Frederickx			
Tessenderlo			

