




F130-500



Technische Infos

recliniserie in os			
Höhe (Dicke)	130mm		
Breite	500mm		
Länge	Wap. S350: 0,70m => 5,40m uit voorraad (per 10cm oplopend)		
	Wap. S700: 1,90m => 5,40m uit voorraad (per 10cm oplopend)		
Feuerwiderstand	1 uur (2u op bestelling)		
Expositionsklasse	XC1		
Transportgewicht	1,77 kN/m²		
Gewicht /m	0,89 kN/m		
Bemessungsgewicht	2,10 kN/m² (incl. voegvulling)		
Hohlraumfüllung	5,41 l/m		
Füllbeton	9 l/m²		
Betongüte	C 40/50		
Stahlqualität	f(yk) 500; f(tk) 550		
	vanaf 3,80 m		


Keurmerken












Spannweiten

Zie hiervoor onze online rekenmodule




Bohrvorschriften

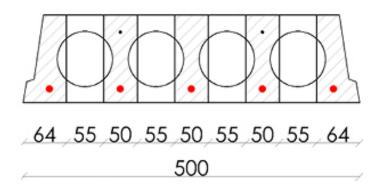









Bewehrungspositionen

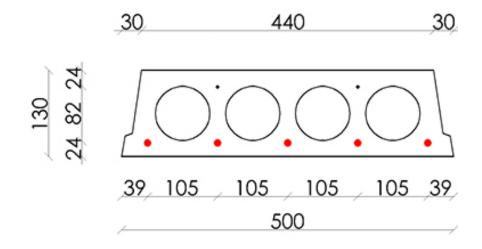








Zubehör



Passplatten - Stahlbeton-Hohlplatte



Schrägschnitte



Ausstehende Bewehrung



Verjüngte Unterseite



Verjüngte Oberseite



Eckaussparungen



Kopfaussparung



Rundaussparung




Rundaussparung + E-Dose



Randaussparung




Ausnehmungen zur Plattenkopplung



Geöffnete Hohlkammern



Open kanalen met inhangwapening



Wechseleisen Stahlbeton-Hohlplatten





Vorrat

	Produktion	Abnehmbar	Vorrätig
Malle 1	Х	X	X
Malle 2			
Frederickx			

Tessenderlo

