


F170-330



Technische Infos


| Höhe (Dicke) | 173mm | | |
|-------------------|--|--|--|
| Breite | 330mm | | |
| Länge | Wap. S350: 0,70m => 5,90m uit voorraad (per 10cm oplopend) | | |
| | Wap. S700: 6,00m uit voorraad | | |
| Feuerwiderstand | 1 uur (2u op bestelling) | | |
| Expositionsklasse | XC1 | | |
| Transportgewicht | 2,25 kN/m² | | |
| Gewicht /m | 0,74 kN/m | | |
| Bemessungsgewicht | 3,00 kN/m² (incl. voegvulling) | | |
| Hohlraumfüllung | 7,43 l/m | | |
| Füllbeton | 11 l/m² | | |
| Betongüte | C40/50 | | |
| | vanaf 5,30 m | | |
| | | | |

Keurmerken










Spannweiten

Zie hiervoor onze online rekenmodule




Bohrvorschriften











Bewehrungspositionen

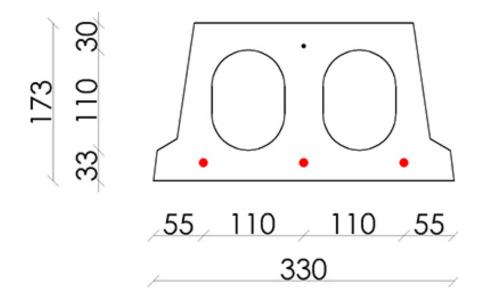







Zubehör



Passplatten - Stahlbeton-Hohlplatte



Schrägschnitte



Ausstehende Bewehrung



Verjüngte Unterseite



Verjüngte Oberseite



Eckaussparungen



Kopfaussparung



Rundaussparung



Rundaussparung + E-Dose




Randaussparung



Geöffnete Hohlkammern



Open kanalen met inhangwapening



Wechseleisen Stahlbeton-Hohlplatten







Vorrat

| | Produktion | Abnehmbar | Vorrätig |
|------------|------------|-----------|----------|
| Malle 1 | Х | X | X |
| Malle 2 | | | |
| Frederickx | | | |

Tessenderlo

