


# F170-600



### **Technische Infos**

Höhe (Dicke)	173mm		
Breite	600mm		
Länge	Wap. S350: 1,00m => 6,00m uit voorraad (per 10cm oplopend)		
	Wap. S700: 5,30m => 5,90m op bestelling (per 10cm oplopend)		
Feuerwiderstand	1 uur (2u op bestelling)		
Expositionsklasse	XC1		
Transportgewicht	2,70 kN/m²		
Gewicht /m	1,62 kN/m		
Bemessungsgewicht	3,00 kN/m² (incl. voegvulling)		
Hohlraumfüllung	6,46 l/m		
Füllbeton	10 l/m²		
Betongüte	C40/50		
	vanaf 5,30 m		

#### Keurmerken






C€








# **Spannweiten**

Zie hiervoor onze online rekenmodule




#### **Bohrvorschriften**

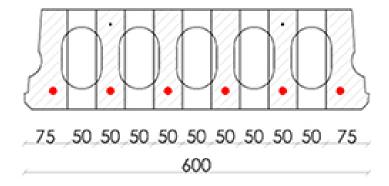









# Bewehrungspositionen

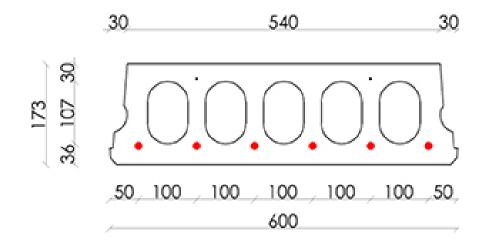








#### Zubehör



Passplatten - Stahlbeton-Hohlplatte




Schrägschnitte



Ausstehende Bewehrung



Verjüngte Unterseite




Verjüngte Oberseite




Eckaussparungen




Kopfaussparung



Rundaussparung




Rundaussparung + E-Dose



Randaussparung




Ausnehmungen zur Plattenkopplung



Geöffnete Hohlkammern



Open kanalen met inhangwapening



Wechseleisen Stahlbeton-Hohlplatten







### Vorrat

	Produktion	Abnehmbar	Vorrätig
Malle 1	Х	X	X
Malle 2			
Frederickx			

Tessenderlo

