

FR13-60




Technische Infos

Höhe (Dicke)	130mm
Breite	596mm
Länge	Wap. S350: 0,60m => 5,20m uit voorraad (per 10cm oplopend) Wap. S700: 5,30m uit voorraad
Feuerwiderstand	1 uur
Expositionsklasse	XC1
Transportgewicht	1,95 kN/m ²
Gewicht /m	1,17 kN/m
Bemessungsgewicht	2,12 kN/m ² (incl. voegvulling)
Hohlraumfüllung	5,54 l/m
Füllbeton	7 l/m ²
Betongüte	C 40/50
Stahlqualität	f(pk)500; f(p0.1k) 550 vanaf 3,80 m

Keurmerken



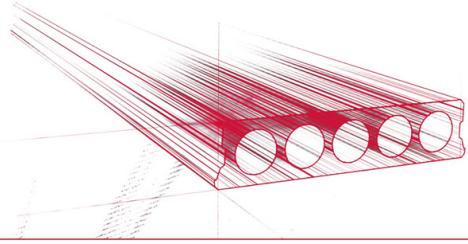


Spannweiten

Zie hiervoor onze online rekenmodule




Bohrvorschriften

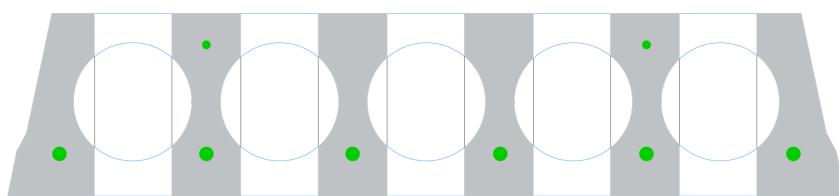



62	55	49	55	49	55	49	55	49	55	63
<hr/>										
										596



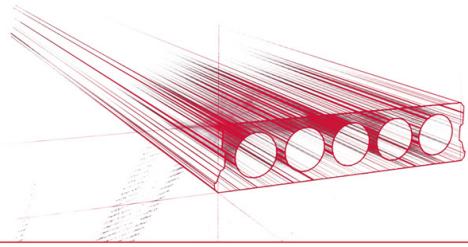

Bewehrungspositionen

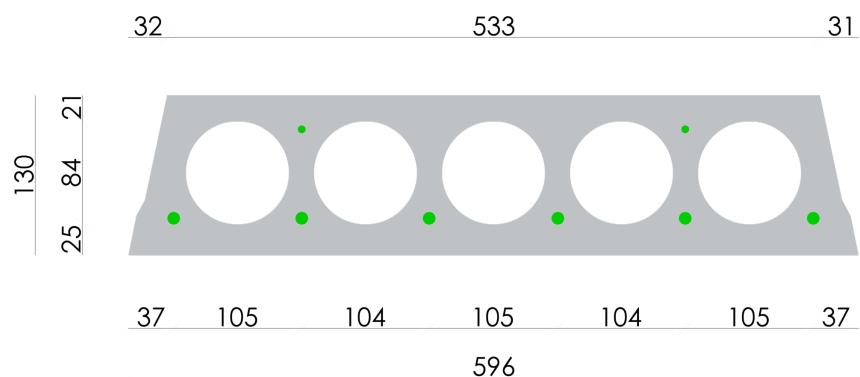

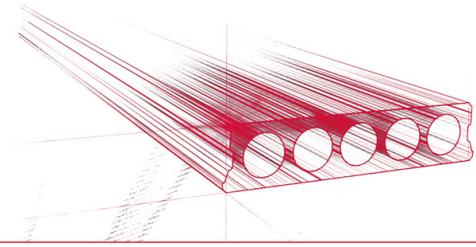


Zubehör



Passplatten - Stahlbeton-Hohlplatte




Schrägschnitte



Ausstehende Bewehrung



Verjüngte Unterseite



Verjüngte Oberseite



Eckaussparungen



Kopfaussparung



Randaussparung




Ausnehmungen zur Plattenkopplung




Geöffnete Hohlkammern



Open kanalen met inhangwapening



Wechseleisen
Stahlbeton-Hohlplatten

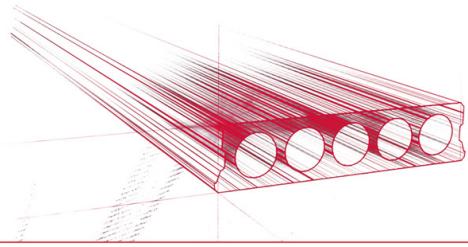

Vorrat

	Produktion	Abnehmbar	Vorrätig
Malle 1			
Malle 2			
Frederickx	X	X	X
Tessenderlo			

