


# FS150-600




## Technische Infos

Höhe (Dicke)	150mm
Breite	596mm
Länge	Malle 1 : Wap. S500: 1,00m => 7,00m op voorraad (per 10cm oplopend) Tessenderlo: Wap. S500: 5,00m => 7,00m op bestelling (per 10cm oplopend)
Feuerwiderstand	1 uur
Expositionsklasse	XC1; XC2; XC3
Transportgewicht	2,38 kN/m <sup>2</sup>
Gewicht /m	1,43 kN/m
Bemessungsgewicht	2,55 kN/m <sup>2</sup> (incl. voegvulling)
Hohlraumfüllung	7,85 l/m
Füllbeton	6,7 l/m <sup>2</sup>
Betongüte	C 50/60

## Keurmerken



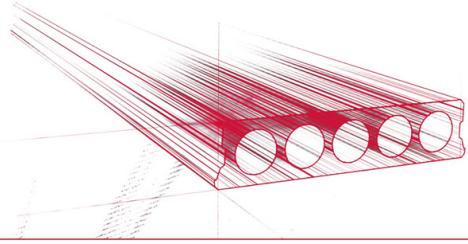

## Spannweiten


---


Zie hiervoor onze online rekenmodule




## Passplatten

---

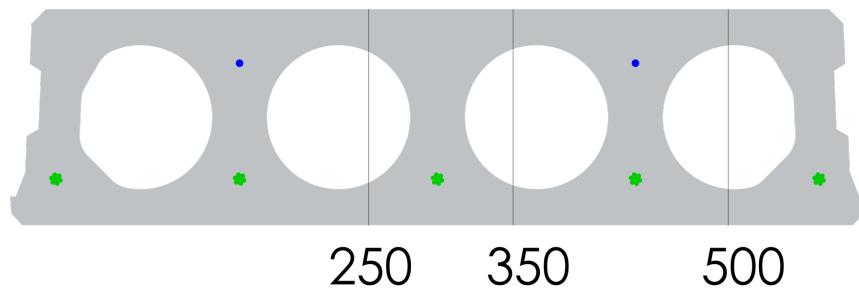


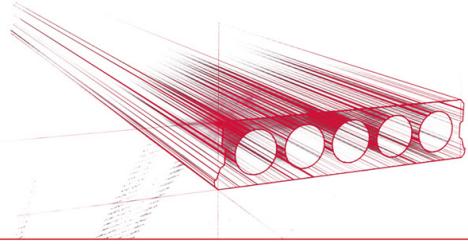


## Bohrvorschriften

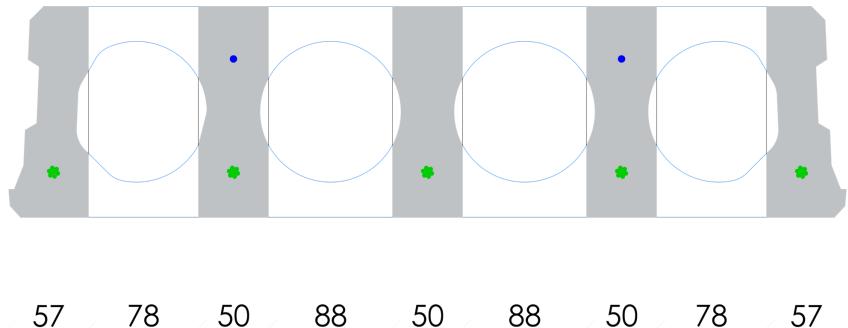

## Bewehrungspositionen

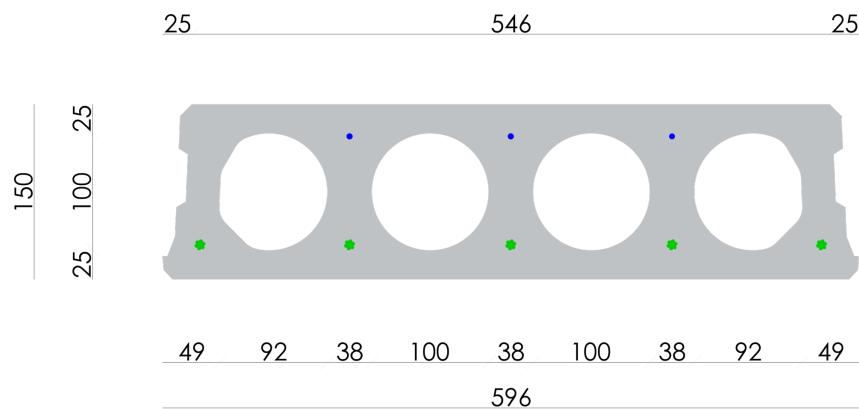

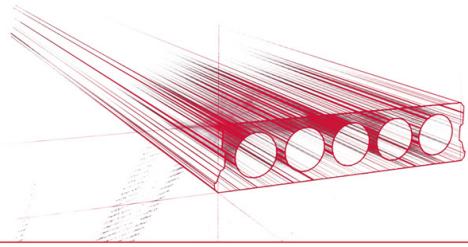


## Zubehör



Passplatten -  
Spannbeton-Hohlplatte



Entwässerungsöffnungen




Schrägschnitte




Ausstehende Bewehrung



Verjüngte Unterseite



Verjüngte Oberseite



Eckaussparungen



Kopfaussparung



Rundaussparung




Randaussparung




Ausnehmungen zur  
Plattenkopplung




Geöffnete Hohlkammern



Open kanalen met  
inhangwapening



Wechseleisen  
Spannbeton-Hohlplatten

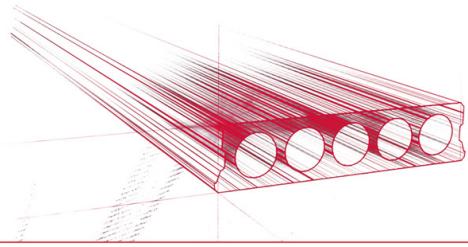

## Vorrat

	Produktion	Abnehmbar	Vorrätig
Malle 1		X	X
Malle 2			
Frederickx			
Tessenderlo	X	X	X

